

VMAX EXPLOSION VENTS


DESCRIPTION

Fike Corporation designs simple, reliable explosion protection solutions to meet your safety requirements. Fike's high performance Vmax vent features a single membrane, multi-dome surface that provides the longest service life for harsh conditions such as pulsating or cycling, higher operating pressures, and stronger vacuum.

The Vmax vent has been tested to perform after 100,000 positive pressure cycles from 0 to 80% of the minimum stamped burst pressure and approximately 1,000,000 vacuum-to-positive cycles of -1 psi to 25% minimum stamped burst pressure (typical of dust collectors).

Typical applications include separation, drying, storage, conveyance, and processing operations.

Fike also offers an exclusive stock vent program with lower costs and shipping within 2 days on the popular sizes and burst pressures.

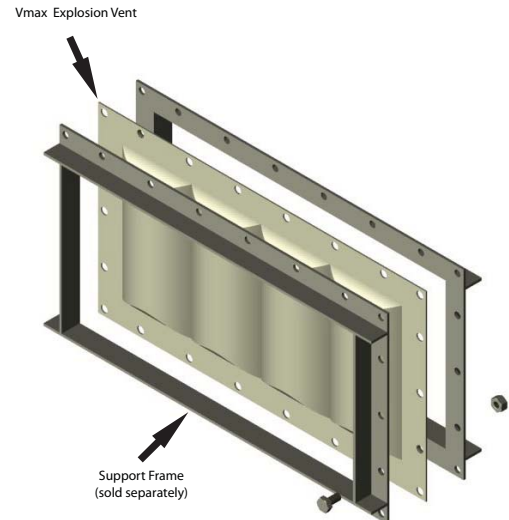

STANDARD FEATURES AND BENEFITS

Inconel Metal Tabs	Provide stable burst pressure ratings independent of temperature fluctuations due to process conditions or weather which in turn provides a longer service life.
FDA Approved Materials	Suitable for food and pharmaceutical applications.
High Operating Ratio	Higher operating ratios allow lower burst pressures, more flexible process conditions, and safer vent design. The Vmax vent has an operating ratio of 80% and provides a longer service life.
Instantaneous Full Opening	Reduced risk of accidental contamination due to undetected openings
Fail-Safe Design	Certified burst pressure provides full, predictable opening at or below its rated burst pressure even if the vent is damaged.
Dynamically Tested - Fike exclusive!	Tested under full-scale explosion conditions.
100% Venting Efficiency	Optimal relief area saves money.
Easy Installation by Plant Personnel	Reduced down time and maintenance costs
Non-Fragmenting Design	Reduced risk to personnel and equipment.

Form No. X.1.09.01-7

SPECIFICATIONS

Compliance:	NFPA 68
Materials of Construction (food grade quality):	Membrane: 316 stainless steel Seal: PTFE
Vacuum rating:	Varies based on size from -4.0 psig to -8.35 psig (see table below)
Maximum Operating Pressure/Maximum Vacuum Rating:	80% of the minimum stamped burst pressure
Burst Pressure Tolerance:	± 0.25 psig for burst pressures 1 psig or less ± 0.50 psig for burst pressures greater than 1 psig
Operating Temperature Range:	0-350°F (-17-175°C)
Operating environment:	The vent panel is specifically designed for dry material applications. If the process vessel is to be washed out or cleaned by CIP (Clean-In-Place) or SIP (Steam-In-Place), the vent should be removed first.
Optional equipment:	Burst indicators/monitoring system; Atmospheric insulation; Process insulation; Weather covers; Flameless Venting

Vent Size Inches (cm)	12 x 18 (30 x 46)	24 x 24 (61 x 61)	18 x 35 (46 x 89)	24 x 36 (61 x 91)	24 x 44 (61 x 112)	36 x 36 (91 x 91)	36 x 44 (91 x 112)
Available burst pressure in psig	1.5* 2.00 2.50 3.00 3.50	1.50* 2.00 2.50 3.00	1.50* 2.00 2.50 3.00 3.50	1.00 1.50* 2.00 2.50	1.50	1.00 1.50* 2.00 2.50	.50 1.00 1.50*
*stock program	4.00 4.50 5.00	3.50 4.00	4.00 4.50	3.00 3.50		3.00 3.50	2.00 2.50
Vacuum Rating in psig	-8.35	-8.35	-5.0	-4.0	-5.0	-8.35	-4.0
Relief Area in ft ² (m ²)	1.30 (0.12)	3.67 (0.34)	4.01 (0.37)	5.59 (0.52)	6.87 (0.64)	8.51 (0.79)	10.45 (0.97)

HOW TO ORDER

Previous Lot Number:	
OR	
Size:	
Burst Pressure:	@ (Temperature)
Top Material:	
Seal Material:	
Support Material:	
Frame Drawing or Bolt Pattern:	



Copyright © Fike Corporation All Rights Reserved.
Form No. X.1.09.01-7 September, 2010 Specifications are subject to change without notice.